

# HTML

2.13.0


HTML , .

/ (<!-- StartFragment , <!-- EndFragment --> ) .

'editor.buildOption.html' 'remainComment' true HTML .( = false)

## synapeditor.config.js

```
{
  'editor.buildOption.html': {
    'remainComment': true
  }
}
```

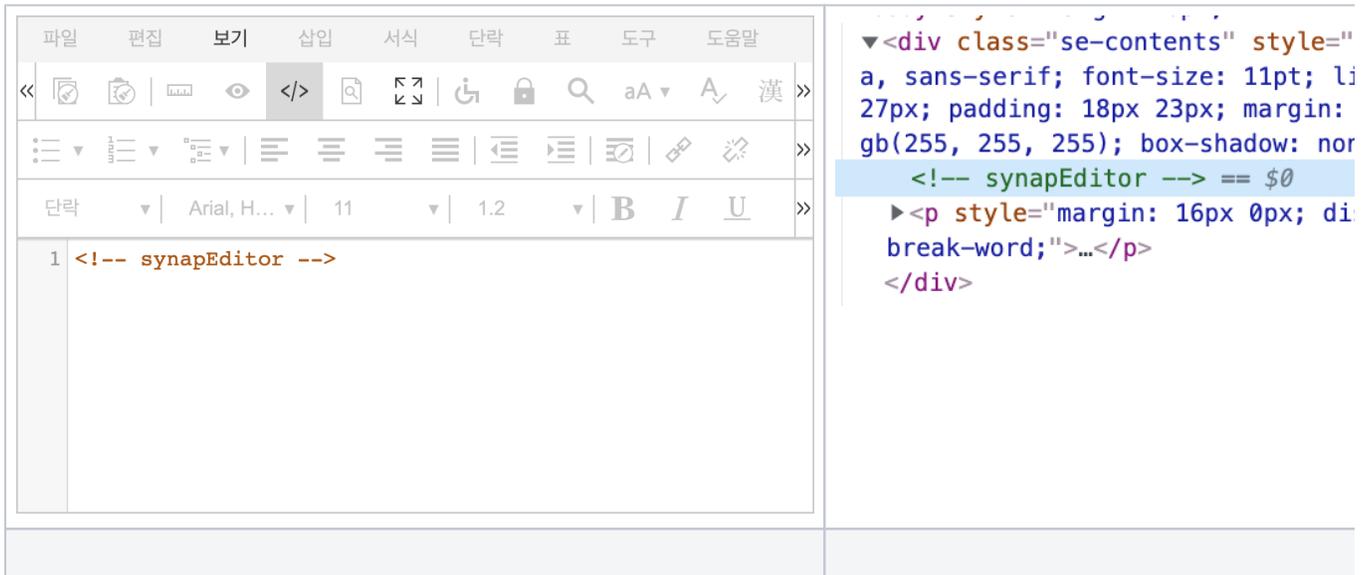

The screenshot shows a web editor interface. On the left is a toolbar with various icons for file operations, editing, viewing, and formatting. Below the toolbar is a text input area containing the code: `1 <!-- synapEditor -->`. On the right is a code preview area showing the rendered HTML output. The preview shows a `<div>` element with a class of `se-contents` and a style attribute. The style includes font settings and padding. Inside the `<div>`, there is a `<p>` element with a style attribute that includes `margin: 16px 0px; display: inline-block; vertical-align: top; width: 100%; border: 1px solid #ccc; padding: 5px; box-shadow: 0 1px 0 #ccc; break-word;`. The `<p>` element contains the text `<!-- synapEditor --> == $0`.